



4

5

Внимание !

Данный продукт не предназначен для использования физически слабыми, умственно отсталыми или психически неполноценными людьми (включая детей), за исключением случаев, когда он используется безопасно с помощью или под руководством лиц, ответственных за их безопасность.

II. Дети должны находиться под присмотром, чтобы гарантировать, что они не будут играть с тренажером.

III. Перед чисткой или ремонтом тренажера обязательно вынимайте вилку из розетки.

IV. Если шнур питания поврежден или ослаблен, его следует заменить в сервисном отделе производителя или квалифицированным персоналом; тип соединения должен быть одинаковым.

V. Вынимайте вилку из розетки после остановки тренажера.

VI. Используйте источник питания, напряжение и частота которого соответствуют напряжению и частоте сети.

Инструкция :

- 1) Убедитесь, что напряжение питания вашей сети совпадает с напряжением питания данного аппарата.
- 2) После подключения всех трубок необходимо правильно выбрать скребок.
- 3) Вставьте всасывающую трубку в всасывающую насадку пылесоса.
- 4) Обратите внимание, что кабель питания должен быть подключен к задней всасывающей насадке.

Сухая уборка :

- 1) Перед началом эксплуатации необходимо установить пылесборник;
- 2) Корпус пылесоса должен быть чистым и сухим.

Влажная уборка :

Перед всасыванием жидкости снимите пылеуловитель;

- 2) Удалите мусор из бака;
- 3) При откачке воды из бака необходимо добавить пеногаситель, чтобы предотвратить попадание пузырьков и повреждение двигателя;
- 4) Гарантия не распространяется на повреждения двигателя, вызванные попаданием воды.

Очистка оборудования :

Очистите бак для мусора и убедитесь, что внутри нет скопившейся грязи.

- 2) Тщательно промойте и почистите щёткой пыле сборный фильтр
- 3) Проверьте шнур питания и убедитесь, что электрические провода не повреждены.
- 4) Промойте пылесборные мешки тёплой водой с моющим средством и используйте их после высыхания.
- 5) Пылесборный мешок следует менять каждые 1-2 недели.

Угольная щетки двигателя пылепоглощения проверяется один раз в год обслуживающим персоналом.

15L VACUUM CLEANERS

Performance Characteristics

Compact structure, super mute design, strong suction ability, multi-purpose attached accessories, convenient combination, and widely used in homes, clubs, workshops, plants, office building and other large public places.


Principal machine




Technical Parameters

Type	HL15/HL151/HL15B	Volume	15L
Working voltage	220V-240V 50Hz/60Hz	Power	1000W
Function	Wet & Dry Vacuum Cleaner	Airflow	48L/S
Cooling mode	Cycle	Barrel body diameter	345mm
Vacuum	210mbar	Accessories	φ 36mm
Height	550mm	Electric wire	7m

Standard attachments

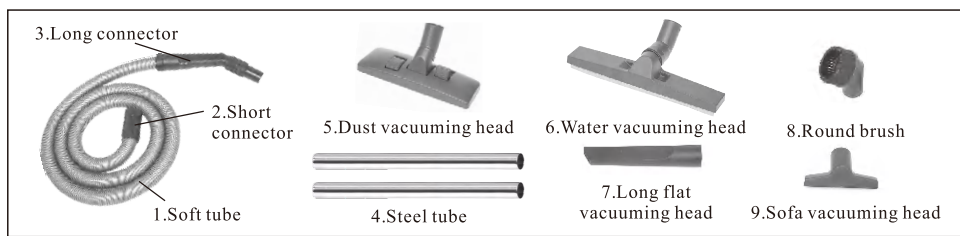

Exploded view of 15L vacuum cleaner

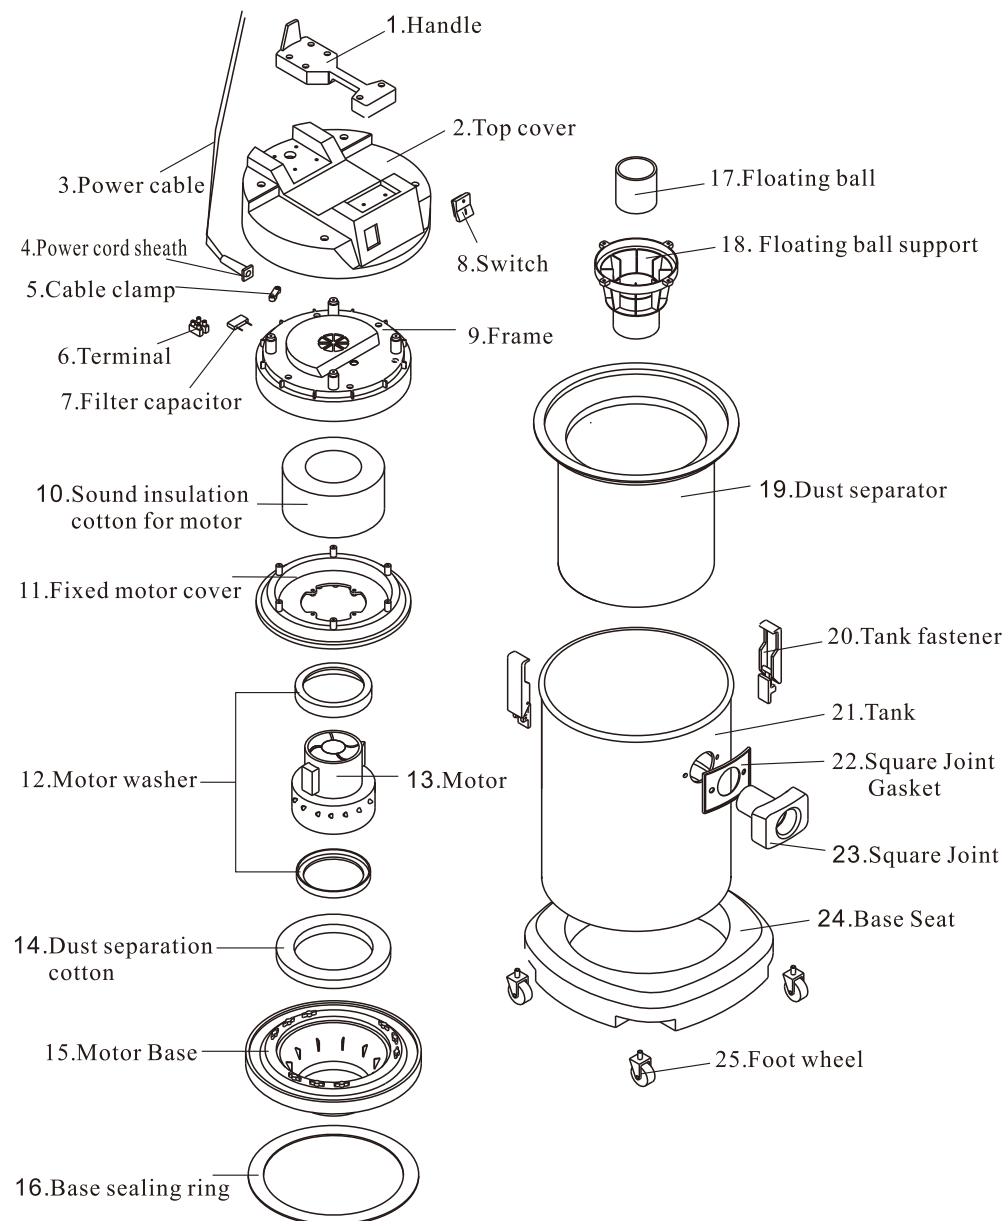

30L VACUUM CLEANERS

Performance Characteristics

Compact structure, super mute design, strong suction ability, multi-purpose attached accessories, convenient combination, and widely used in homes, clubs, workshops, plants, office building and other large public places.

Principal machine

HL30 Normal base




HL301 One-body plastic tank




Technical Parameters

Type	HL30/HL301	Volume	30L
Working voltage	220V-240V 50Hz/60Hz	Power	1000W
Function	Wet & Dry Vacuum Cleaner	Airflow	53L/S
Cooling mode	Cycle	Barrel body diameter	345mm
Vacuum	230mbar	Accessories	φ 40mm/φ 36mm
Height	760mm	Electric wire	7m

Standard attachments

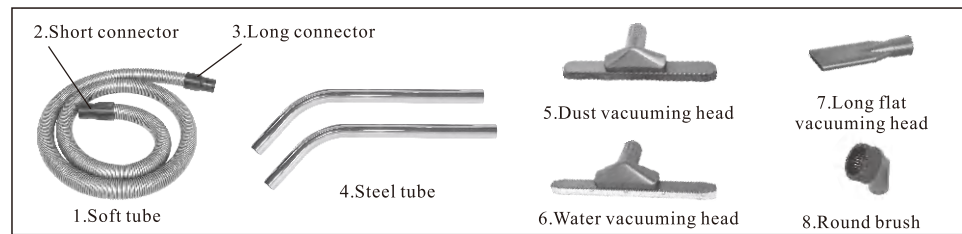

Exploded view of 30L vacuum cleaner

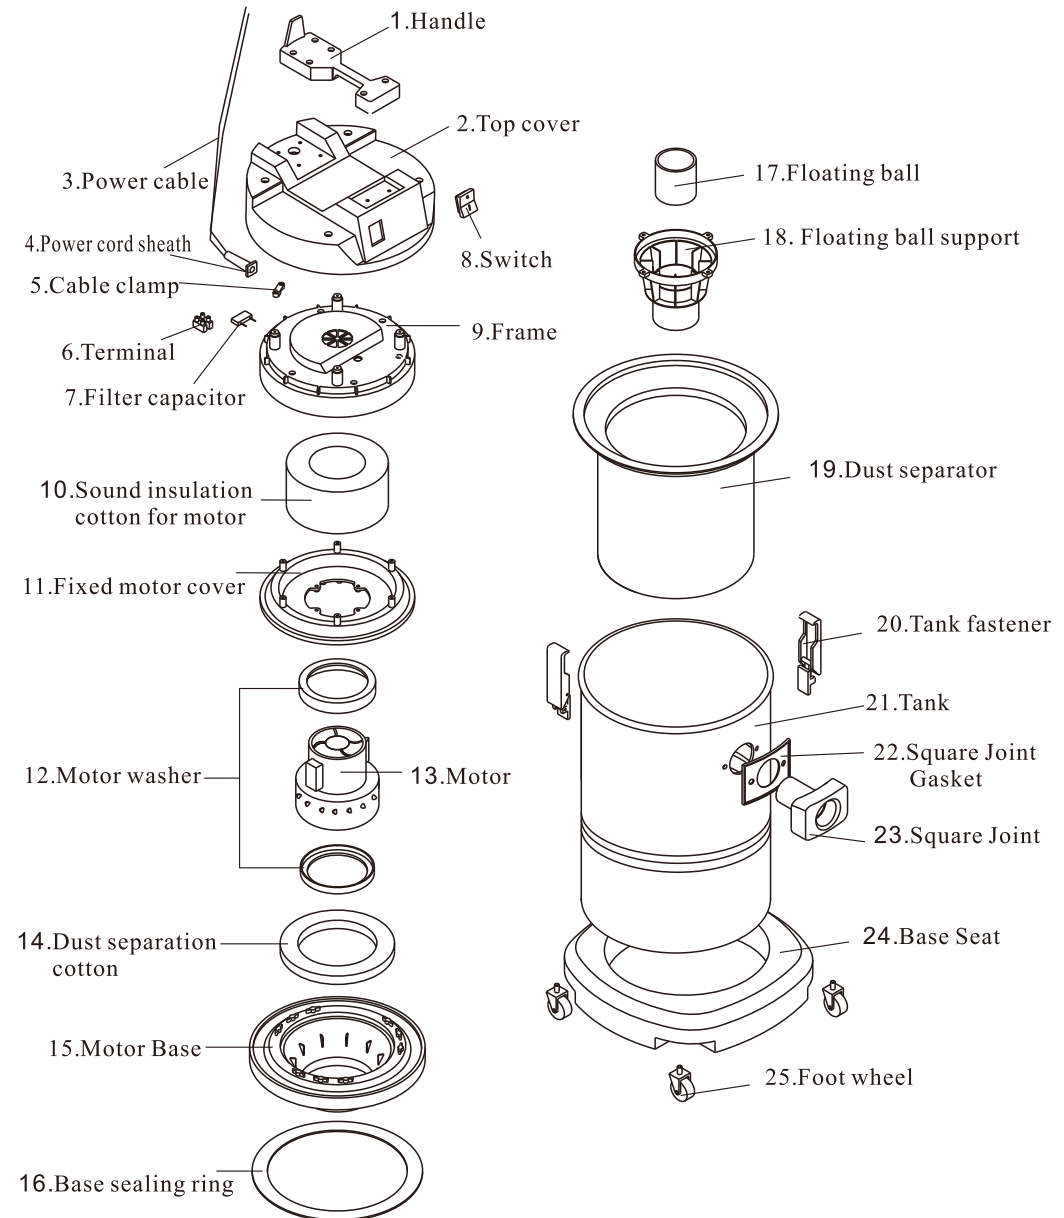

60L VACUUM CLEANERS(two-motor)

Performance Characteristics

Motor with outstanding suction force, ideal dust and water suction effect, multi-purpose attached accessories, convenient combinations, widely used in large workshops, plants, markets, hotels, office buildings and other large public places.


Principal machine




Technical Parameters

Type	HL60-2/HL60-2J/HL60-2B	Volume	60L
Working voltage	220V-240V 50Hz/60Hz	Power	2000W
Function	Wet & Dry Vacuum Cleaner	Airflow	106L/S
Cooling mode	Cycle	Barrel body diameter	440mm
Vacuum	250mbar	Accessories	φ 40mm
Height	970mm/900mm/900mm	Electric wire	8m

Standard attachments

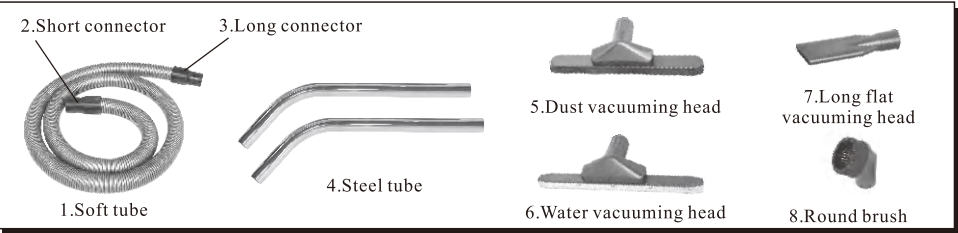

Exploded view of 60L vacuum cleaner(two-motor)

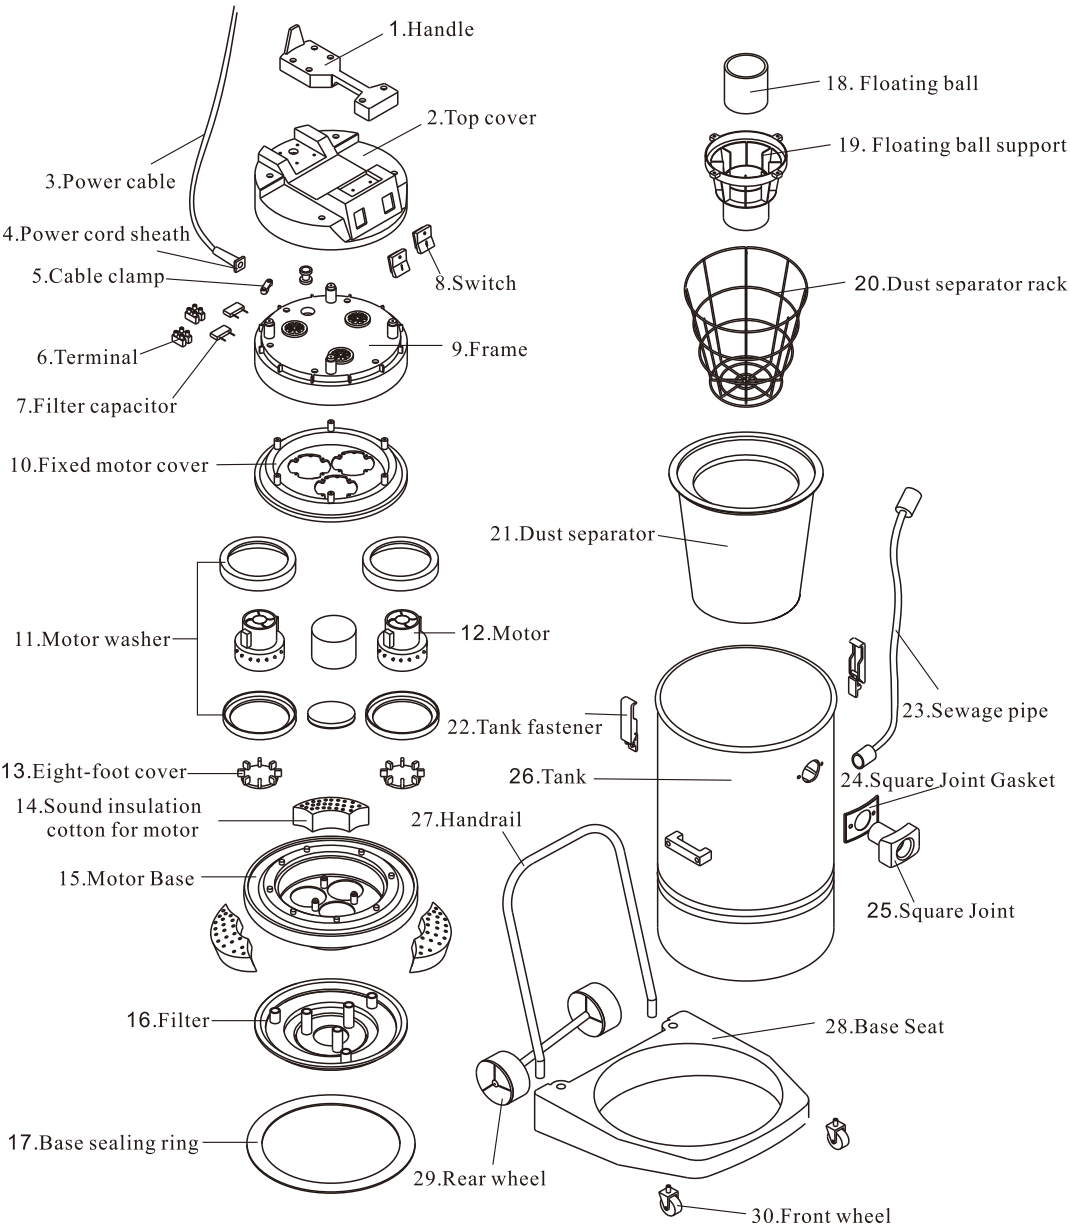

60L VACUUM CLEANERS(three-motor)

Performance Characteristics

Motor with outstanding suction force, ideal dust and water suction effect, multi-purpose attached accessories, convenient combinations, widely used in large workshops, plants, markets, hotels, office buildings and other large public places.


Principal machine




Technical Parameters

Type	HL60-3/HL60-3J/HL60-3B	Volume	60L
Working voltage	220V-240V 50Hz/60Hz	Power	3000W
Function	Wet & Dry Vacuum Cleaner	Airflow	159L/S
Cooling mode	Cycle	Barrel body diameter	440mm
Vacuum	250mbar	Accessories	φ 40mm
Height	970mm/900mm/900mm	Electric wire	8m

Standard attachments

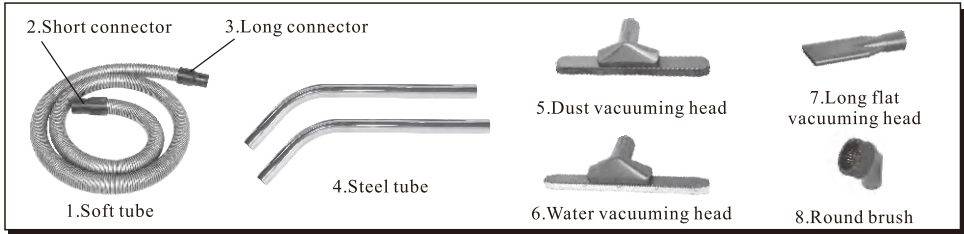

Exploded view of 60L vacuum cleaner(three-motor)

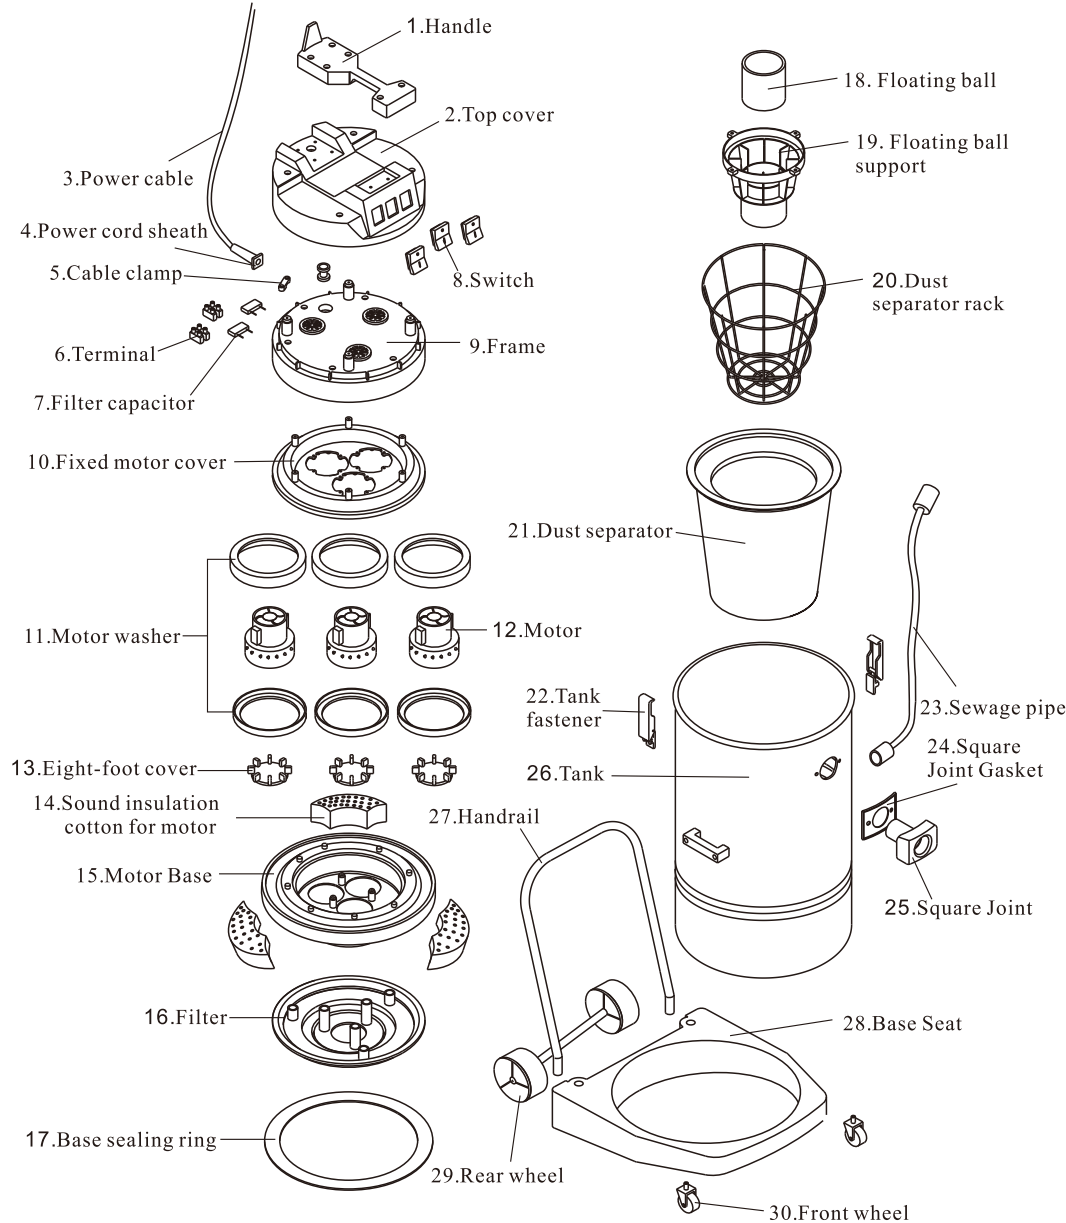

80L VACUUM CLEANERS(two-motor)

Performance Characteristics

Compact structure, super mute design, strong suction ability, multi-purpose attached accessories, convenient combination, and widely used in homes, clubs, workshops, plants, office building and other large public places.


Principal machine




Technical Parameters

Type	HL80-2/HL80-2J	Volume	80L
Working voltage	220V-240V 50Hz/60Hz	Power	2000W
Function	Wet & Dry Vacuum Cleaner	Airflow	106L/S
Cooling mode	Cycle	Barrel body diameter	440mm
Vacuum	250mbar	Accessories	φ 40mm
Height	1000mm	Electric wire	8m

Standard attachments

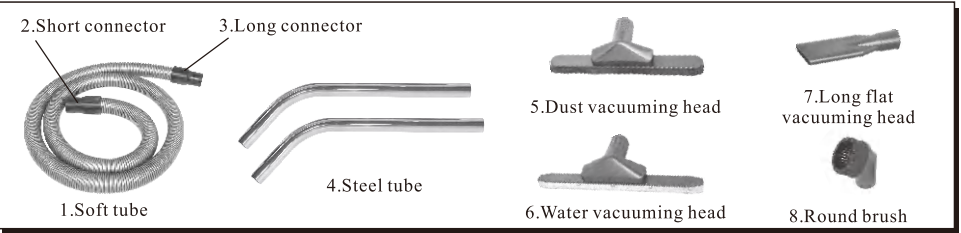

Exploded view of 80L vacuum cleaner(two-motor)

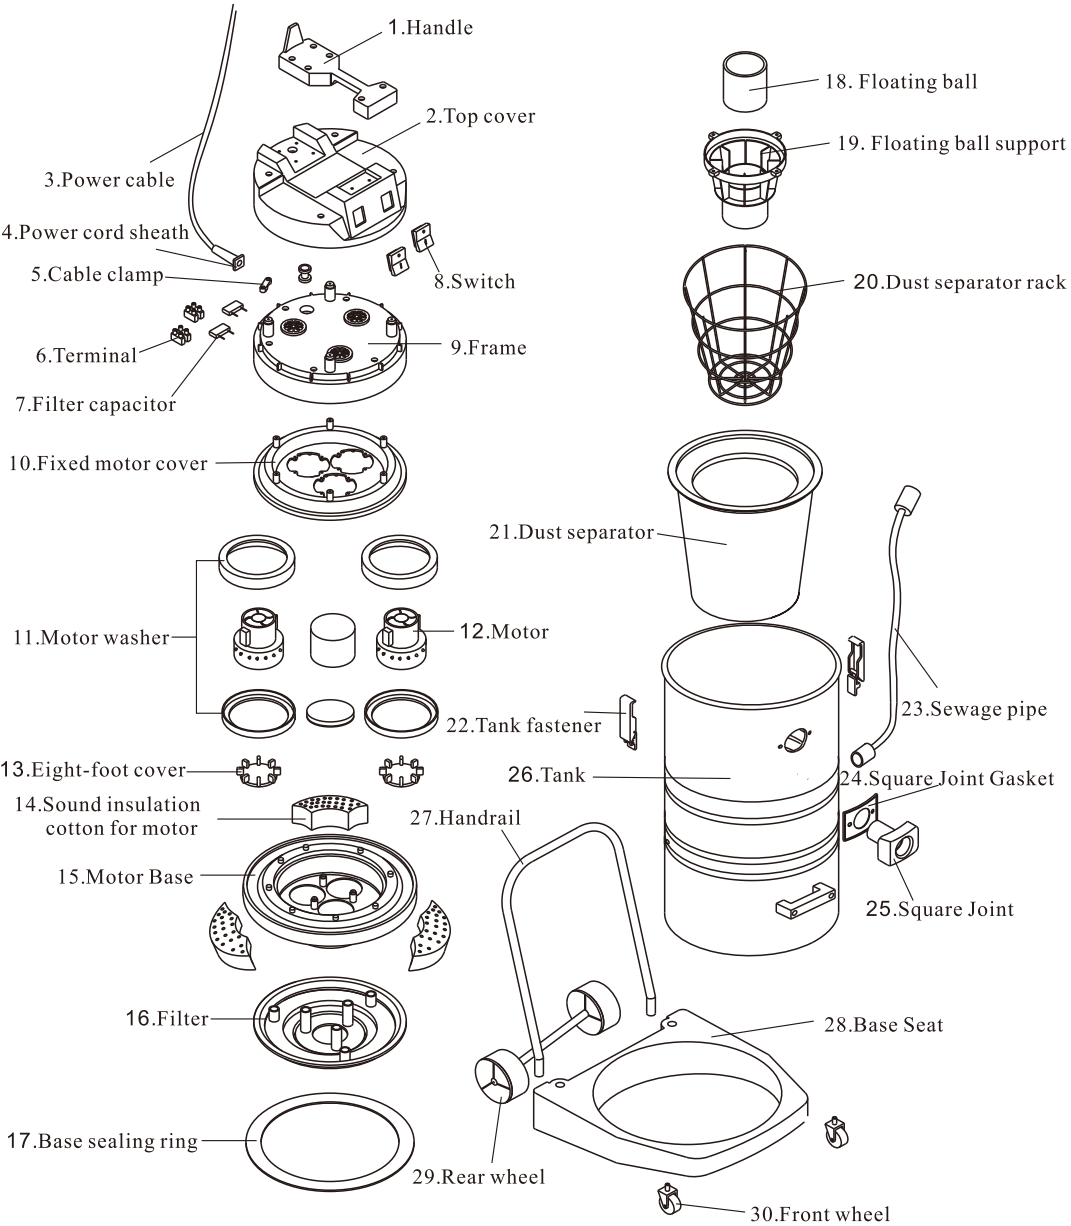

80L VACUUM CLEANERS(three-motor)

Performance Characteristics

Compact structure, super mute design, strong suction ability, multi-purpose attached accessories, convenient combination, and widely used in homes, clubs, workshops, plants, office building and other large public places.


Principal machine




Technical Parameters

Type	HL80-3/HL80-3J	Volume	80L
Working voltage	220V-240V 50Hz/60Hz	Power	3000W
Function	Wet & Dry Vacuum Cleaner	Airflow	159L/S
Cooling mode	Cycle	Barrel body diameter	440mm
Vacuum	250mbar	Accessories	φ 40mm
Height	1000mm	Electric wire	8m

Standard attachments

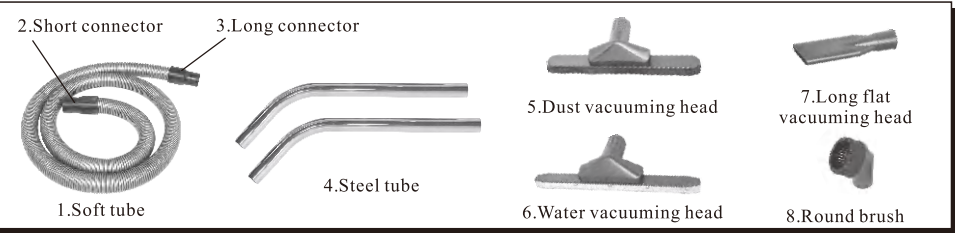

Exploded view of 80L vacuum cleaner(three-motor)

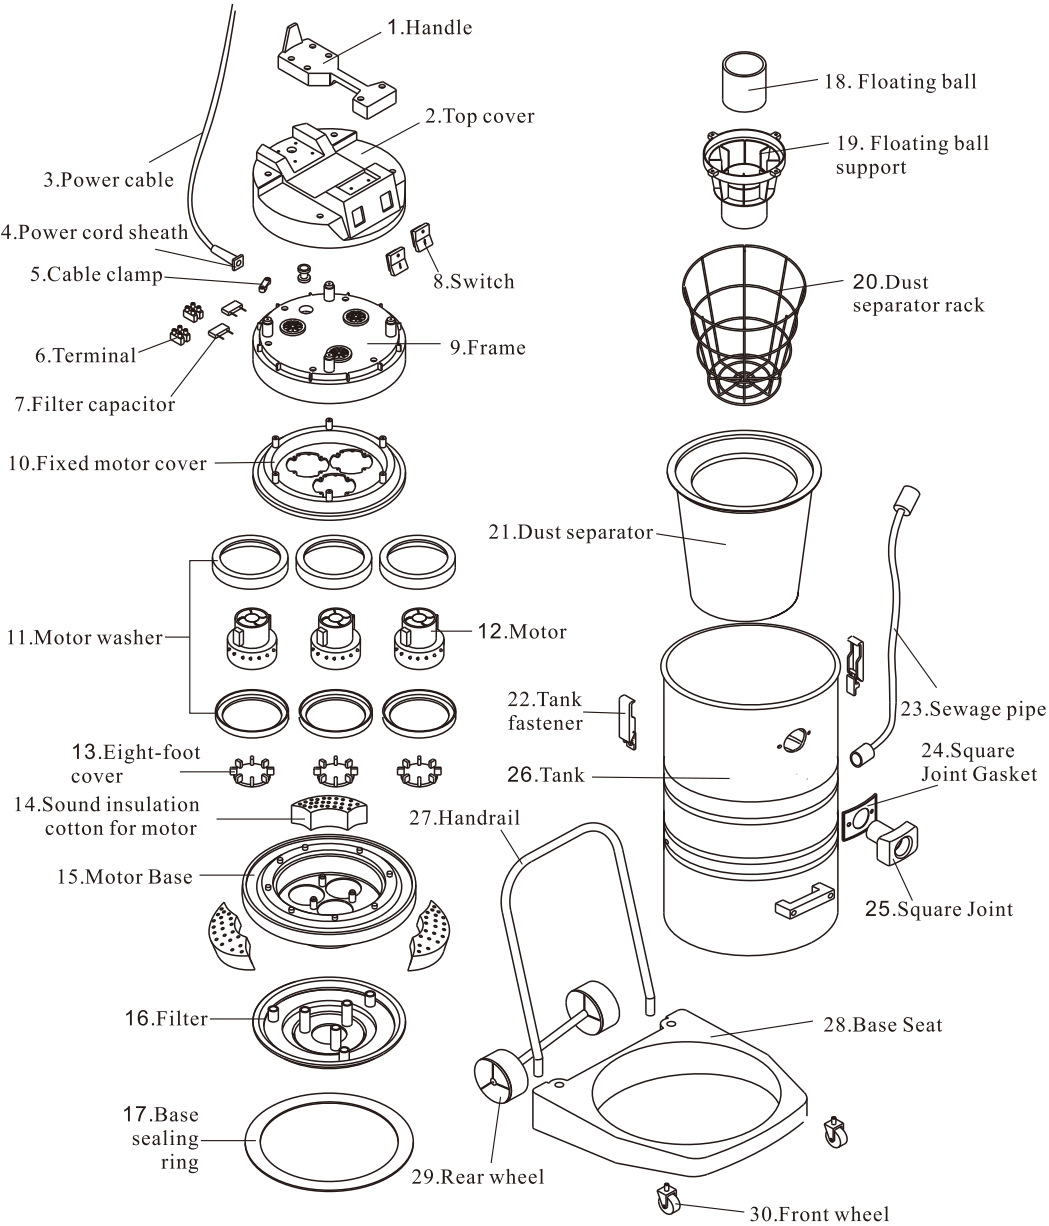

90L VACUUM CLEANERS(two-motor)

Performance Characteristics

Compact structure, super mute design, strong suction ability, multi-purpose attached accessories, convenient combination, and widely used in homes, clubs, workshops, plants, office building and other large public places.


Principal machine




Technical Parameters

Type	HL90-2	Volume	90L
Working voltage	220V-240V 50Hz/60Hz	Power	2000W
Function	Wet & Dry Vacuum Cleaner	Airflow	106L/S
Cooling mode	Cycle	Barrel body diameter	440mm
Vacuum	250mbar	Accessories	φ 40mm
Height	1000mm	Electric wire	8m

Standard attachments

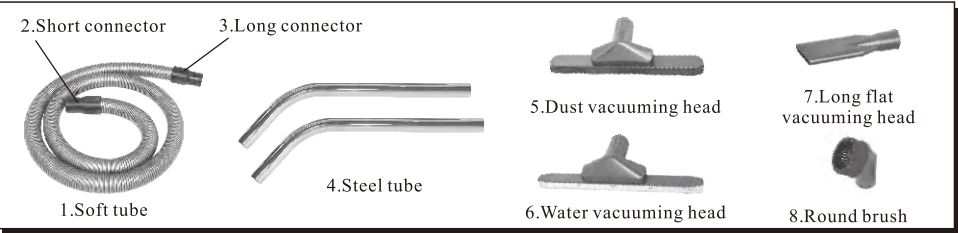

Exploded view of 90L vacuum cleaner(two-motor)

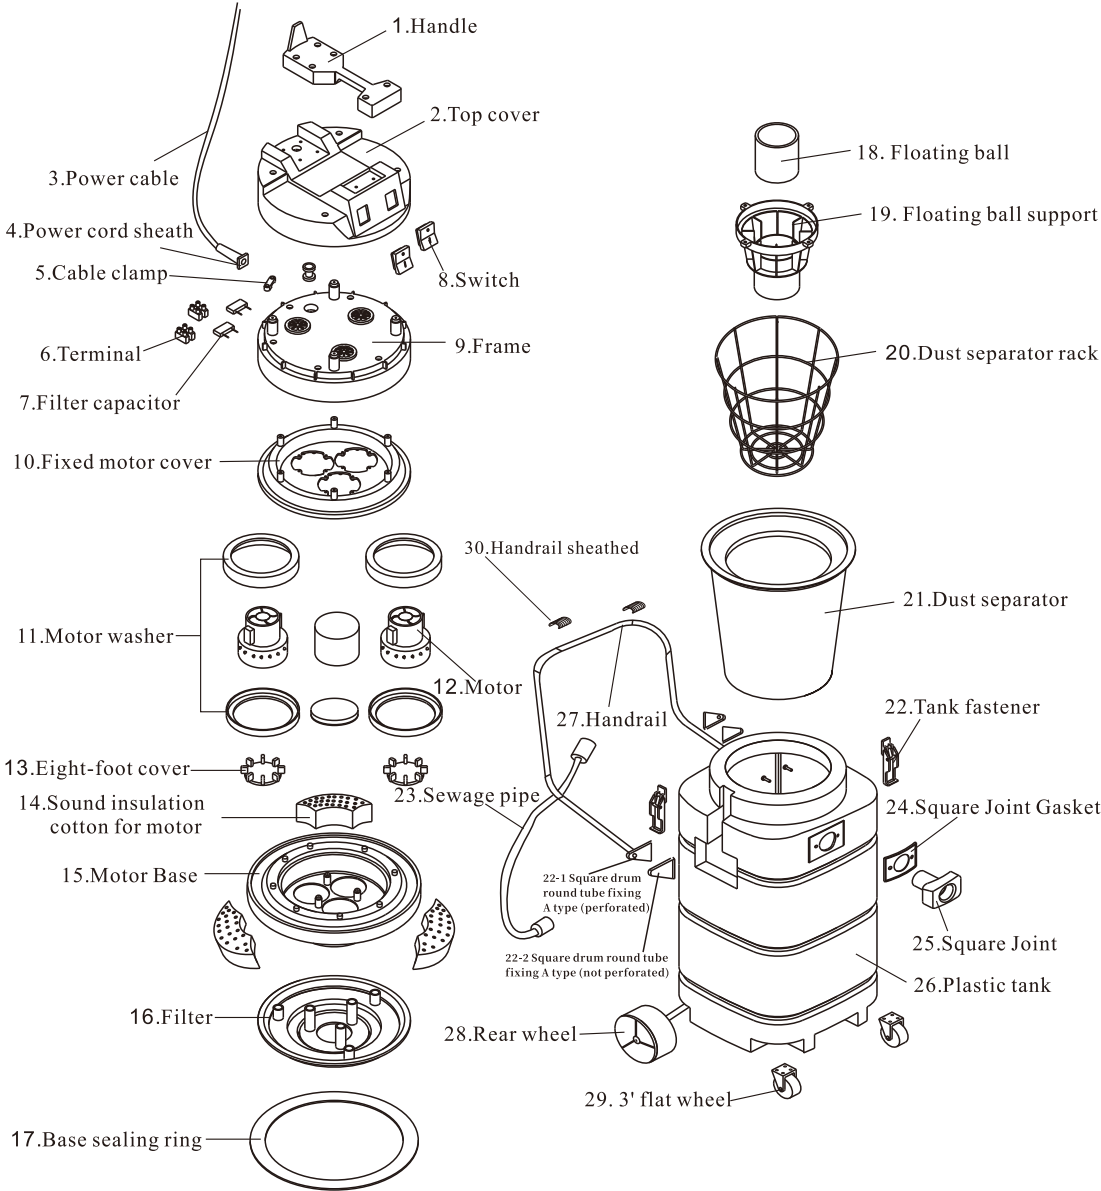

90L VACUUM CLEANERS(three-motor)

Performance Characteristics

Compact structure, super mute design, strong suction ability, multi-purpose attached accessories, convenient combination, and widely used in homes, clubs, workshops, plants, office building and other large public places.


Principal machine



Technical Parameters

Type	HL90-3	Volume	90L
Working voltage	220V-240V 50Hz/60Hz	Power	3000W
Function	Wet & Dry Vacuum Cleaner	Airflow	159L/S
Cooling mode	Cycle	Barrel body diameter	440mm
Vacuum	250mbar	Accessories	φ 40mm
Height	1000mm	Electric wire	8m

Standard attachments

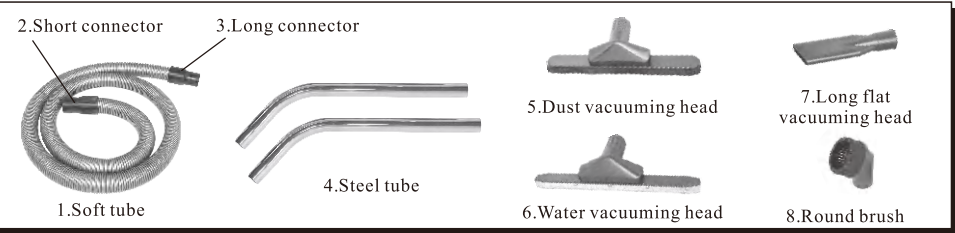

Exploded view of 90L vacuum cleaner(three-motor)

